

RETENTION TANKS

COMPOSITE STYLE - MANUFACTURED BY STRUCTURAL FIBERS

FIG. NO.	MODEL NO.	DIAMETER	HEIGHT	WEIGHT (LBS)	PRICE
	CT 30	16	44	25	
	CT 40 SQ	21	35	28	
	CT 40	16	56	33	
47942	CT80	21	67	43	
47943	CT120	24	73	63	

Maximum operating pressure = 75 psi

EPOXY COATED STEEL TANKS

FIG. NO.	MODEL NO.	DIAMETER	HEIGHT	WEIGHT (LBS)	PRICE
	RT30	16	39	32	
50798	RT42T	16	53	44	
	RT42S	20	36	53	
50799	RT80	20	64	84	
50800	RT120	24	66	139	
	RT220	30	78	295	


Maximum operating pressure = 75 psi, TEMP 125°F

GALVANIZED TANKS

FIG. NO.	MODEL NO.	DIAMETER	HEIGHT	WEIGHT (LBS)	PRICE
25514	GT30	16	39	52	
7854	GT42T	16	51	71	
7858	GT42S	20	34	71	
7861	GT80	20	64	114	
7864	GT120	24	65	154	
23340	GT220	30	80	303	

Maximum Operating Pressure 75 PSI, Temp 140oF. Option: Galvanized tanks can be ordered for 125 PSI.

Typical Installation w/Chemical Feed Pump

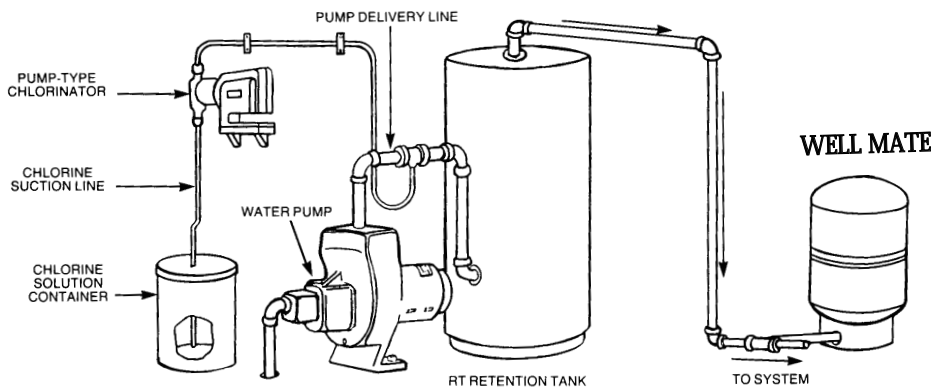

Polyethylene Solution Tanks

Used to hold mixed chemical solutions for chemical feed pumps. The lids feature a convenient feed hole for easy solution replenishment.

FIG. NO.	SIZE	DIMENSIONS	PRICE
25237	15 Gal	14 x 24	
39019	30 Gal	18 x 30	
49219	35 Gal	23 x 26	
40897	40 Gal	18 x 40 1/2	
49251	55 Gal	23 x 40 1/2	
40734	75 Gal	24 x 40 1/2	