


ULTRAVIOLET WATER EQUIPMENT

DWC Ultraviolet water treatment equipment is for germicidal solution, TOC/organic reduction and deo-
 zonation. Generally, equipment is manufactured using 304 stainless for potable and light
 commercial/industrial markets and 316L for critical industrial and high purity water markets. DWC UV
 lights utilize germicidal UV lamps that produce short wave radiation that is lethal to bacteria, viruses and
 other micro-organisms present in common water.

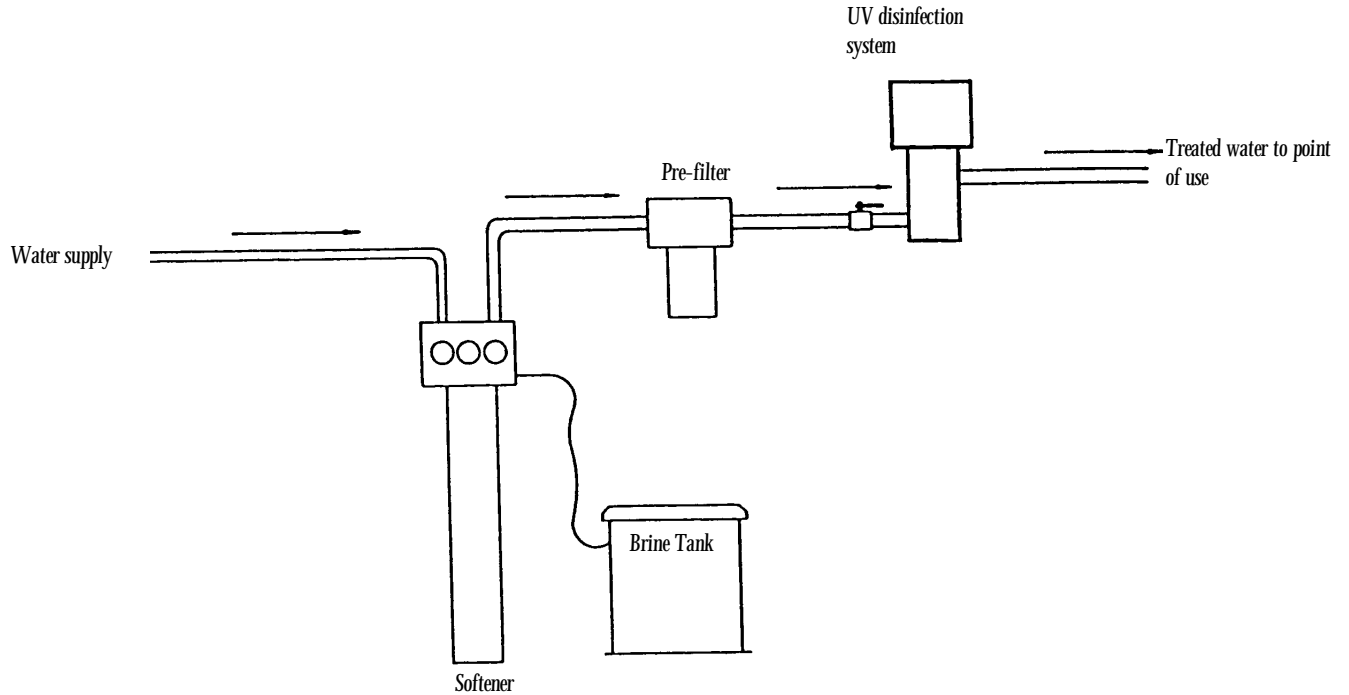

RECOMMENDED MAXIMUM CONCENTRATION LEVELS

BEFORE ULTRAVIOLET INFLUENT
 FOR STANDARD APPLICATIONS

TURBIDITY	5 NTU	MAXIMUM
SUSPENDED SOLIDS	10 MG/1	MAXIMUM
COLOR	NONE	MAXIMUM
IRON	0.3 MG/1	MAXIMUM
MANGANESE	0.05 MG/1	MAXIMUM
Ph	6.5-9.5	MAXIMUM