
## SPLIT TANK SYSTEM

## HIGH EFFICIENCY IN A SPACE-SAVING DESIGN

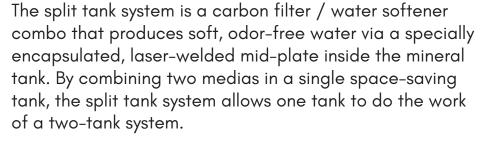

This split tank system provides for both activated carbon in the top chamber to remove chlorine and high-capacity softening resin in the bottom. This creates softened

water while also removing chlorine and treating tastes and odor in the water.

These systems are designed with upflow brining to prolong the life of the media and provide maximum efficiency. They also save floor space and conserve water and energy usage.

In addition, split tank systems provide significant reduction in costs and installation time and effort — while offering ease in serviceability.

Available in 10" and 13" tank sizes. All tanks com

Available in 10" and 13" tank sizes. All tanks come with a dome hole for media replacement or replenishment (such as for pH neutralization media). All models come with pre-filled softening resin in the lower chamber and an upper basket to prevent media loss.

Tank Size	Resin	Carbon
10 x 54	1.0 CF Premium Softening Resin (Max capacity 32k grains)	0.5 CF Activated Carbon
13 x 54	1.5 CF Premium Softening Resin (Max capacity 48k grains)	1.0 CF Activated Carbon

Endless possibilities for mixing media in the two chambers!